

Printhead: i3200-A1 Width: 300mm

LC-A3 2H DTF Printer




Printing Speed

Mode Type	Draft	Production	Quality
F1080-A1	18 m²/h	13.5 m²/h	10.3 m²/h
I3200-A1	24 m²/h	16 m²/h	13 m²/h

Used together with a powder shaker and heat press machine



Application Cases

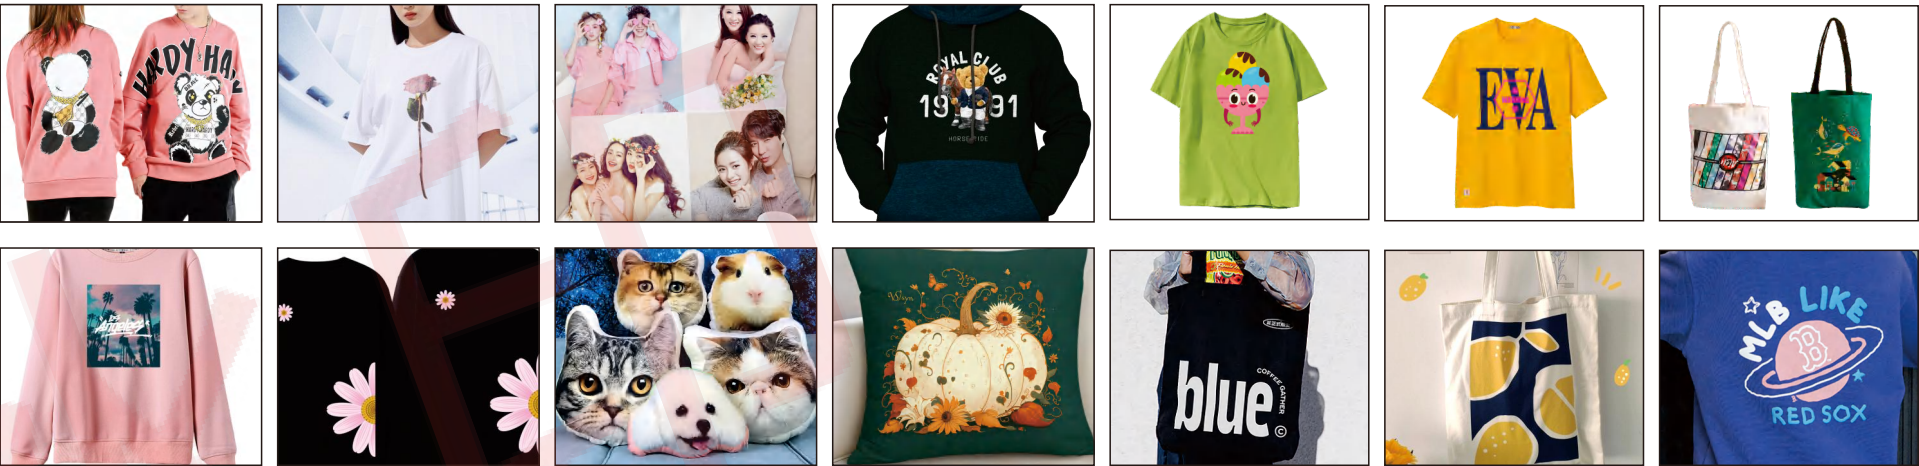

Product Technical Specifications

*Specifications and configurations are based on the actual product and may change without prior notice.

Product Model	LC-302	Maximum Roll Weight	< 40kg
Printhead Type	Epson i3200-A1/i1600-A1	Drying System	Powder Shaker Drying
Number of Printhead	2	Operation Language	Chinese/English
Printhead Height	1.5-2.5mm	Computer System	Win11/Win10
Printhead Cleaning	Fully automatic cleaning with anti-clogging, flash spraying, and automatic moisturizing functions	Working Environment	Temperature range 18°C-25°C; Humidity range 35%-65% Rh
		Printing Interface	Gigabit Ethernet Port
Ink Type	Pigment Ink	RIP Software	Maintop
Ink Color	C/M/Y/K + W	Power Parameters	AC-220V, 50Hz/60Hz
Ink Cartridge Capacity	CMYK: 250ml; W: 500ml	Power (W)	Standby power 64W, maximum power 1200W
Ink Supply Method	Negative pressure continuous ink supply system	Machine Dimensions	1100mm x 675mm x 501mm (L x W x H)
Printing Width	300mm	Machine Weight	94 Kg
Media	Heat Transfer PET Film	Package Dimensions	1157mm x 716mm x 650mm (L x W x H)